

ECO-TOUCH® Pgrm Wall Control

Item #: 44929



Description

- 20 minutes ventilation / 40 minutes recirculation, speed selectable mode
- Relative humidity display
- Preferences for desired indoor relative humidity
- ECO Mode will automatically choose the best operating settings based on the home's current conditions
- LCD backlit tough screen
- Ventilation movement is displayed on screen
- No battery to replace

Application


Technologically advanced and feature-rich; the ECO-TOUCH® provides contractors and homeowners with higher level of control over indoor air quality. The MAX mode gives you the extra ventilating power you need to quickly clear the air by taking advantage of the system's powerful fans. During...

[Find more details in our online catalogue](#)

Technical parameters

| Dimensions and weights | |
|------------------------|------|
| Weight | 1 lb |

Dimensions

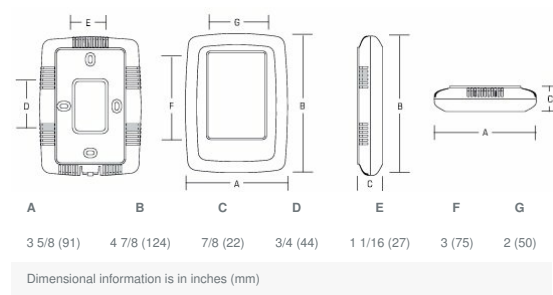

Documents

- 422530 ECO-TOUCH SPEC SHEET EN.PDF
- 413702 ECOTOUCH BROCHURE ENG.PDF
- 422528 ECO-Touch Operation manual.pdf
- 400608 ECO-TOUCH INSTALLATION MANUAL.PDF
- ECO-TOUCH VIDEO.MP4