


PB110L7 Bath Fan w/ 7W LED

Item #: 44942

Variante : 120V 1~ 60Hz

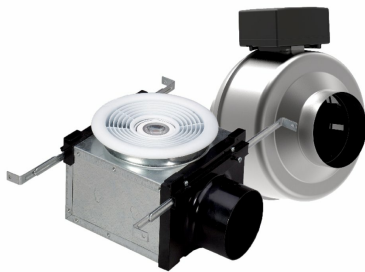

Description

- Powerful, efficient 110 cfm fan with a LED light
- Remote mount fan ensures quiet operation
- Unobtrusive grille makes for better aesthetics
- ENERGY STAR® qualified

Application

A small-scale grille mounts in the ceiling while the fan motor mounts in a remote location away from the living area. The result is a quiet yet powerful combination designed to help protect your home from the damaging effects of humidity. PB fans are designed for intermittent or continuous operation to meet ASHRAE Standard 62.2.


Model

110 cfm fan, one ceiling grille with light and grille housing with a damper. One 7W...
Find more details in our online catalogue

Technical parameters

Nominal data	
Voltage (nominal)	120 V
Frequency	60 Hz
Phase(s)	1~
Input power	20 W
Input current	0.18 A
Impeller speed	2,886 r.p.m.
Air flow	max 139.0 cfm
Protection/Classification	
Enclosure class, motor	IP44
Insulation class	B
Dimensions and weights	
Duct dimension; Circular, inlet	4 in.
Duct dimension; Circular, outlet	4 in.
Weight	10 lb
Optional	
Duct connection type	Circular

Dimensions

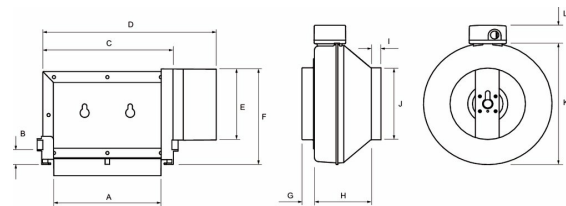


	A	B	C	D	E	F	G	H	I	J	K	L
M												
o												
de												
I												
P	5	3/4	7	9	4	5	1	6	1	4	8	2
B	15/16	(3/8	3/4	(3/8	(1/2	(1/2	1/1	1
11	16	(8	4	1	8	2	2	2	1	(2
0	(15	1	(1	(2	0	(1	2	(1	5	0	2	(
	1)	9	87	48	1	37	5	6	5	1	1	6
)))))))	5)))	6	4
))
P	5	3/4	7	9	4	5	1	6	1	4	8	8
B	15/16	(3/8	3/4	(3/8	(1/2	(1/2	1/1	1
11	16	(8	4	1	8	2	2	2	1	(2
OL	(15	1	(1	(2	0	(1	2	(1	5	0	2	2
7	1)	9	87	48	1	37	5	6	5	1	1	2
)))))))	5)))	6	6
))
P	5	3/4	7	9	4	5	1	6	1	4	8	8
B	15/16	(3/8	3/4	(3/8	(1/2	(1/2	1/1	1
11	16	(8	4	1	8	2	2	2	1	(2
OL	(15	1	(1	(2	0	(1	2	(1	5	0	2	2
10	1)	9	87	48	1	37	5	6	5	1	1	2
)))))))	5)))	6	6
))


Dimensions in inches (mm)

Wiring


Without Motor Speed Controller

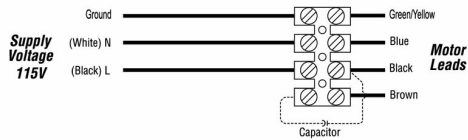

With Motor Speed Controller

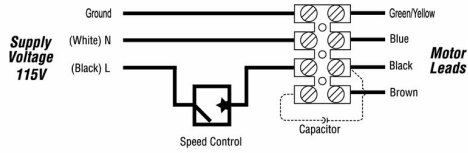

Multiple Location Switching Wiring Diagram

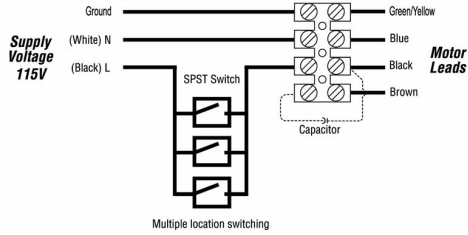

Accessories

FD60EM Electronic Timer Switch (411386)
HS 4W External Louver Exhaust (45151)

FIDT 4 Insulated Flex Duct (411061)
IPHS5 Humidity / Fan Control (156040)

Documents

E1575 VENTILATION SOLUTIONS BATHROOM.PDF
484089 PB SERIES OIPM EN FR ES.PDF