

PRO™ 100 Exhaust Fan

Item #: 98501



Description

- 2.0 Sones
- Built-in backdraft damper
- High efficiency motor
- 3 year warranty

Application

The PRO 100 exhaust fan provides remarkably quiet, energy efficient ventilation for bathrooms, powder rooms and other areas with square footage up to 130 sq. ft. The fans are designed for intermittent or continuous operation to meet **ASHRAE Standard 62.2**.

Model


100 cfm fan with a ceiling grille and damper. Uses a 4" flexible duct. The PRO100 fan has a unique plug and play concept that allows you to add accessories such as a humidity sensor without changing the fan. The product is provided with an...

[Find more details in our online catalogue](#)

Technical parameters

Nominal data	
Voltage (nominal)	120 V
Frequency	60 Hz
Phase(s)	1~
Phase(s), motor	1~
Input power	25 W
Input current	0.4 A
Impeller speed	1,167 r.p.m.
Air flow	max 100.0 cfm
Temperature of transported air	23 to 104 °F
Sound data	
Loudness	2 Sone
Protection/Classification	
Enclosure class, motor	IP44
Insulation class	B
Dimensions and weights	
Duct dimension; Circular, inlet	4 in.
Weight	9 lb
Optional	
Duct connection type	Circular

Dimensions

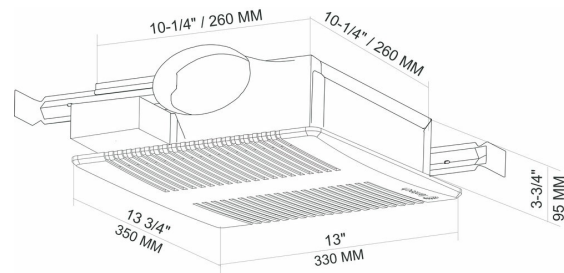

Accessories

FD60EM Electronic Timer Switch (411386)
HS 4W External Louver Exhaust (45151)
PRO™ Accs., LED Light Grille (98509)

FIDT 4 Insulated Flex Duct (411061)
PRO™ Accs., Humidity Sensor (98508)
PRO™ Ceiling Radiation Damper (98599)

Documents

153508 Pro Series IOM EN
445442 Pro Series Bath Fan Spec Sheet EN