

PRO™ 80 Exhaust Fan

Item #: 98500



Description

- 1.2 Sones
- Built-in backdraft damper
- High efficiency motor
- 3 year warranty

Application

The PRO 80 exhaust fan provides remarkably quiet, energy efficient ventilation for bathrooms, powder room and other areas with square footage up to 130 sq. ft. The fans are designed for intermittent or continuous operation to meet ASHRAE Standard 62.2.

Model


80 cfm fan with a ceiling grille and damper. Uses a 4" flexible duct. The PRO80 fan has a unique plug and play concept that allows you to add accessories such as a humidity sensor without changing the fan. The product is provided with an adjustable...

[Find more details in our online catalogue](#)

Technical parameters

Normal data	
Voltage (nominal)	120 V
Voltage type	AC
Frequency	60 Hz
Phase(s)	1~
Input power	26 W
Input current	0.35 A
Impeller speed	1,065 r.p.m.
Air flow	max 80.0 cfm
Temperature of transported air	23 to 104 °F
Protection/Classification	
Enclosure class, motor	IP44
Insulation class	B
Dimensions and weights	
Duct dimension; Circular, outlet	4 in.
Weight	9 lb
Optional	
Duct connection type	Circular

Dimensions

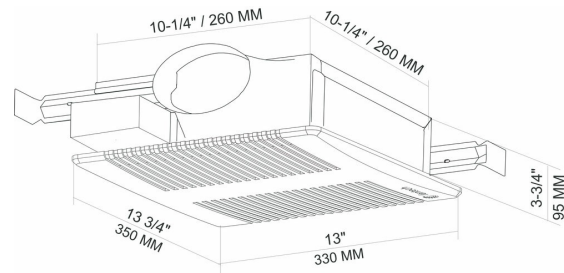

Accessories

FD60EM Electronic Timer Switch (411386)
HS 4W External Louver Exhaust (45151)
PRO™ Accs., LED Light Grille (98509)

FIDT 4 Insulated Flex Duct (411061)
PRO™ Accs., Humidity Sensor (98508)

Documents

153508 Pro Series IOM EN
445442 Pro Series Bath Fan Spec Sheet EN